



PRODUCT SPECIFICATION

Instrument connection

1/4, 3/8, 1/2
PT, G, NPT, M

Scale ranges

Pressure gauge:
0 ... 4 bar to 0 ... 40 bar
Transmitter:
-1 ... 40 bar, or all other equivalent vacuum or
combined pressure and vacuum ranges

Material

Body:
304 SS, 316 SS, 316L SS
Diaphragm:
316L SS

Medium temperature

Silicone oil (-30°C ... 250°C)
Mid-temp oil (-45°C ... 300°C)

Others

Welded with instrument

PRODUCT DESCRIPTION

▼
External chemical seal with welded diaphragm,
designed to suit connections in the pulp and paper
industries


▼
Suitable for attaching to pressure gauges, pressure
switches, and pressure instruments

▼
Designed to be used for highly viscous process
media such as pulp and plastic, and chemicals



The product images displayed in the catalog are illustrative,
and the actual products will be customized to your requirements.

DIMENSIONS

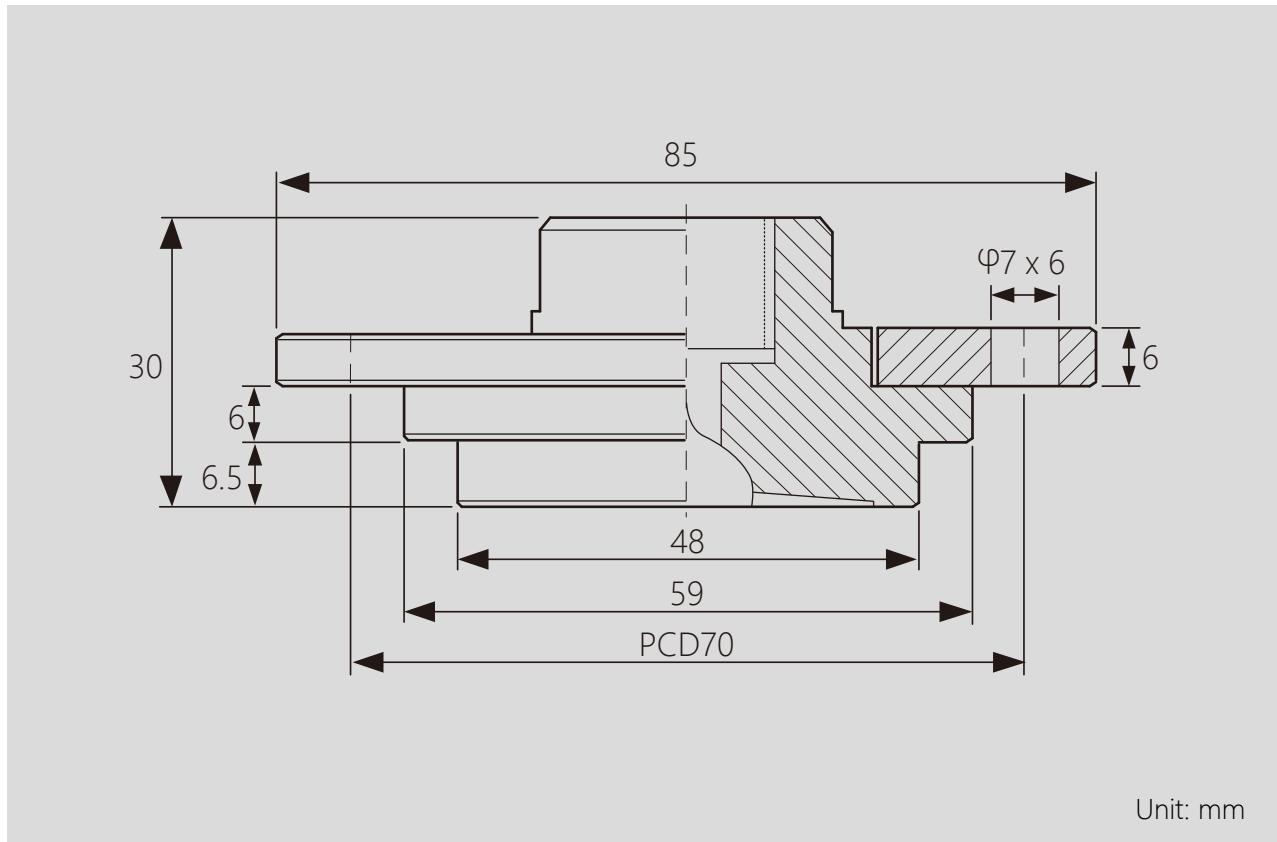



Gauging your needs!

ORDERING INFORMATION

Model / Material / Medium Temperature / Connection location of pressure gauge / Nominal size / Scale range / Options

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com