




Flanged Connection, Upper Metal, Lower Plastic

Model: DIF-USLP

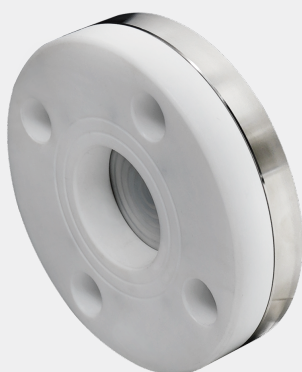

PRODUCT DESCRIPTION

▼
A metal upper body that connects to the instrument is tight and durable

▼
Plastic lower body can protect pressure instruments from corrosive, contaminated or viscous media

▼
Suitable for paint, electroplating, sewage treatment and the paper industry

PRODUCT SPECIFICATION

Type of process connection

ANSI/ ASME B16.5, JIS, DIN2527

Nominal diameter

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 3", 4"

Instrument connection

1/4, 3/8, 1/2

PT, G, NPT, M

Scale ranges - metal diaphragm

Pressure gauge:

1/2", 3/4":

0 ... 4 bar to 0 ... 25 bar

1" ... 1 1/4":

-1 ... 3 bar,

0 ... 1.6 bar to 0 ... 25 bar

2":

-1 ... 1.5 bar,

0 ... 0.6 bar to 0 ... 25 bar

3", 4":

-1 ... 0.6 bar,

0 ... 0.6 bar to 0 ... 25 bar

Transmitter:

1/2", 3/4":

0 ... 0.4 bar to 0 ... 25 bar

1" ... 1 1/4":

-1 ... 0.6 bar,

0 ... 0.25 bar to 0 ... 25 bar

2":

-1 ... 0.6 bar,

0 ... 0.1 bar to 0 ... 25 bar

3", 4":

-0.05 ... 0.05 bar to 0 ... 25 bar

or all other equivalent vacuum or combined pressure and vacuum ranges

Scale ranges - PTFE diaphragm

Pressure gauge:

1/2", 3/4":

-1 ... 5 bar,

0 ... 2.5 bar to 0 ... 25 bar

1" ... 1 1/4":

-1 ... 1.5 bar,

0 ... 1.6 bar to 0 ... 25 bar

2":

-1 ... 0.6 bar,

0 ... 0.6 bar to 0 ... 25 bar

3", 4":

-1 ... 0.6 bar,

0 ... 0.1 bar to 0 ... 25 bar

Transmitter:

1/2", 3/4":

-1 ... 3 bar,

0 ... 0.4 bar to 0 ... 25 bar

1" ... 1 1/4":

-1 ... 0.6 bar,

0 ... 0.1 bar to 0 ... 25 bar

2":

-0.05 ... 0.05 bar to 0 ... 25 bar

3", 4":

-0.05 ... 0.05 bar to 0 ... 25 bar

or all other equivalent vacuum or combined pressure and vacuum ranges

Material

Upper body:

304 SS, 316 SS, 316L SS, Duplex SS, Hastelloy Alloy, Tantalum, Titanium, Monel 400 Alloy, Nickel 200

Lower body:

PP, PVC, PVDF, PTFE

Diaphragm:

PTFE, Hastelloy Alloy, Titanium, Tantalum, Monel 400 Alloy, Nickel 200, Silicone, Viton®, 316L+PTFE*¹, 316L+PTFE Coating*²

* Note:

1. When the diaphragm material is 316L with PTFE, it is not suitable for vacuum applications.
2. When the diaphragm material is 316L with PTFE coating, it must not be used in vacuum environments or for measuring media containing particles.

The product images displayed in the catalog are illustrative, and the actual products will be customized to your requirements.

Medium temperature

0°C ... 60°C (PVC),


0°C ... 80°C (PP),

-40°C ... 120°C (PVDF),

-200°C ... 240°C (PTFE)

Others

Welded with instrument, capillary

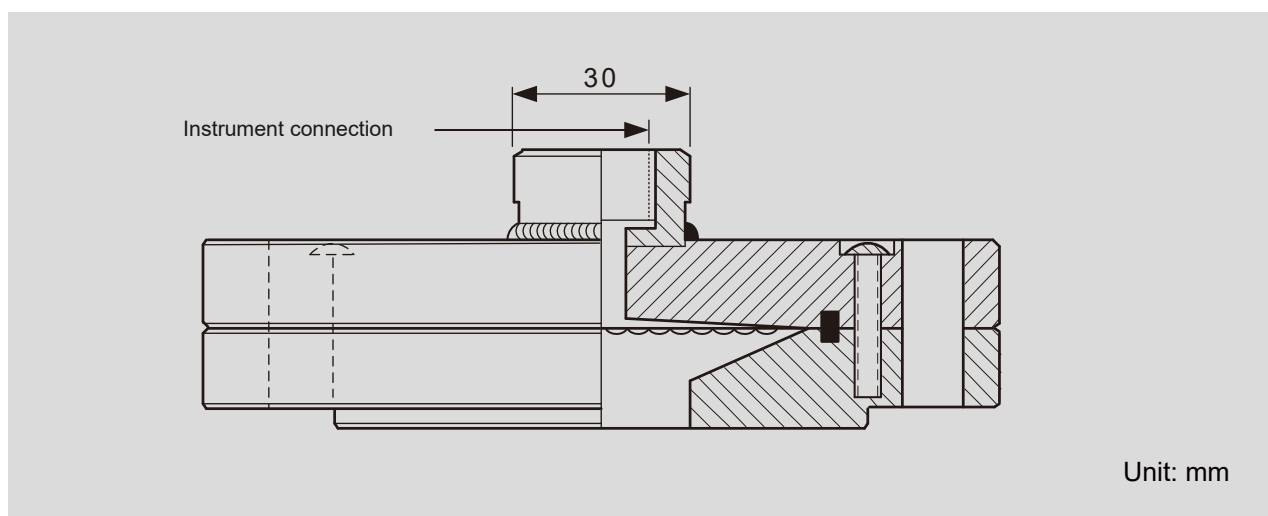DIMENSIONS



Gauging your needs!

ORDERING INFORMATION

Model / Type / Process connection / Nominal diameter / Material

Pressure gauge / Nominal size / Scale range / Medium temperature / Options

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com

- For any changes to the specifications of this catalogue,the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.