



Thermowell for Thermometer, Flanged

Model: TWF



PRODUCT DESCRIPTION

- ▼ Can be installed on bimetal thermometers, thermometer pointers, and thermocouples
- ▼ Suitable for high process and high chemical loads

PRODUCT SPECIFICATION

Version
Fabricated from pipe,
machined from solid bar stock

Type
Straight, tapered, stepped

Connection to thermometer
1/4, 3/8, 1/2, 3/4
PT, G, NPT, M

Type of process connection
JIS, ANSI, DIN

Nominal diameter
1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 3"


Pressure rating
ANSI: 150, 300, 600LB...
JIS: 5, 10, 16K...
DIN: PN6, 10, 16...

Thermowell
Material: 304 SS, 316 SS
Length: can be customized
Diameter: 9.5, 10, 12, 15 mm

Accessories (option)
Coating, bushing

The product images displayed in the catalog are illustrative, and the actual products will be customized to your requirements.

DIMENSIONS

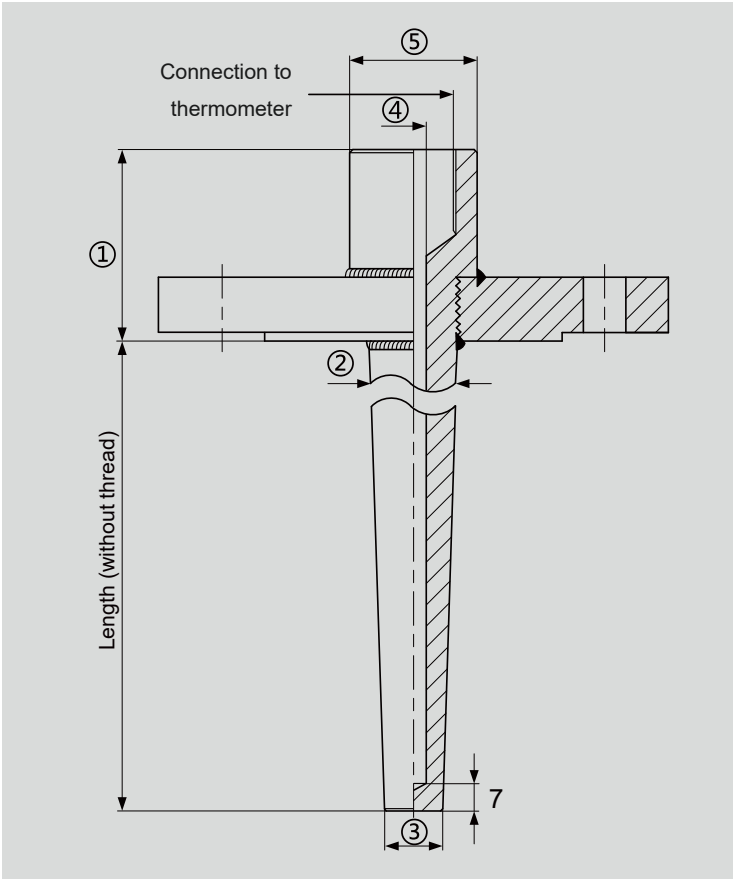

Nominal diameter	Pressure rating	Dimensions (mm)				
		①	②	③	④	⑤
1"	150	55	22	15	7 / 9	28
	300	55	22	15	7 / 9	28
	600	55	22	15	7 / 9	28
	1500	85	22	15	7 / 9	28
1 1/2"	150	55	25	19	7 / 9	28
	300	55	25	19	7 / 9	28
	600	55	25	19	7 / 9	28
	1500	85	25	19	7 / 9	28
2"	150	55	25	19	7 / 9	28
	300	55	25	19	7 / 9	28
	600	55	25	19	7 / 9	28
	1500	85	25	19	7 / 9	28



Gauging your needs!

ORDERING INFORMATION

Model / Version / Type / Connection to thermometer / Type of process connection / Nominal diameter / Pressure rating / Thermowell / Accessories / Options

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com

- For any changes to the specifications of this catalogue, the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.