

大型顯示器數字面板式指示錶

型號：LMPL

產品介紹

- 採用RS485通訊，提供1至2組警報輸出
- 具備大型顯示螢幕，可即時觀測壓力或液位之數據變化



產品規格

顯示字元

2.3"

長: 4.8 cm / 高: 5.8 cm

4"

長: 6 cm / 高: 10 cm

顯示螢幕

LED顯示

2.3"

長: 27 cm / 高: 10 cm

4"

長: 37 cm、45 cm、55 cm,
依顯示字元而定

高: 15 cm

顯示範圍

3位數: 0 ... 999

4位數: 0 ... 9999

5位數: 0 ... 99999

繼電器接點容量

AC 230V/5A

DC 30V/5A

通訊方式

RS485 Modbus RTU mode

鮑（波特）率

9600 bps

環境溫、濕度

-20°C ... 80°C/20% ... 90% RH 非結露




輸入電壓

AC/DC 100V ... 240V

DC 24V

產品尺寸

2.3" LED

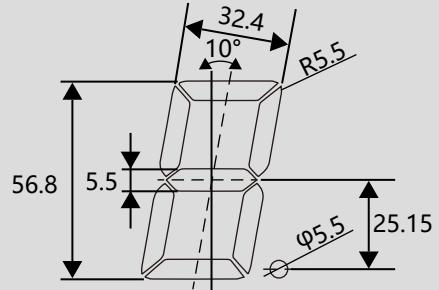




單位: mm

※外型尺寸包含右邊單位，如需左邊加字則長度需增加100mm

產品尺寸

4" LED

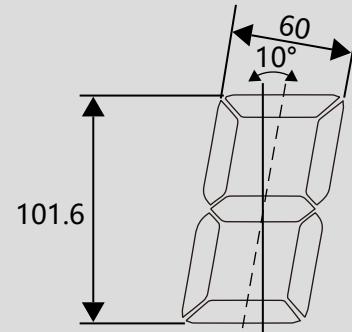

單位: mm

※外型尺寸包含右邊單位，如需左邊加字則長度需增加100mm

選型表

LMPL 大型顯示器數字面板式指示錶輸入數字控制表

| 選型 | 代碼 | 樣式規格 |
|----|----|-------------------|
| 1 | A | 輸入種類 4-20 mAdc |
| | V | 0-10 Vdc |
| 2 | | 顯示位數 |
| | 3 | 3位數 |
| | 4 | 4位數 |
| | 5 | 5位數 |
| 3 | | LED尺寸 |
| | 2 | 2.3" |
| | 4 | 4" |
| 4 | | 輸入電壓 |
| | A | AC100~240 V |
| | C | DC 24 V |
| | O | 其他範圍 |
| 5 | | 警報輸出 |
| | R1 | Relay*1 |
| | R2 | Relay*2 |
| | N | 無 |
| 6 | | 通訊輸出 |
| | Y | RS485 |
| | N | 無 |

型號規格：

LMPL -

| | | | | | |
|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 |
| | | | | | |

本型錄圖片、規格若有更動，以最新版本為準。更動後不另行通知



忻珈企業有限公司
TEL:02-2550-4512
info@sinjiagauge.com
www.sj-gauge.com
103017 台北市大同區赤峰街71巷3號